




VOLTAGE RANGE: 50 --- 1000 V

CURRENT: 1.0 A

DO - 213AB

Features

- Plastic package has underwriters laboratories flammability classification 94V-0
- Glass passivated chip junction
- For surface mount applications
- High temperature metallurgically bonded construction
- Cavity-free glass passivated junction
- High temperature soldering guaranteed:450 /5 seconds at terminals.Complete device sub-mersible temperature of 265 for 10 seconds in solder bath

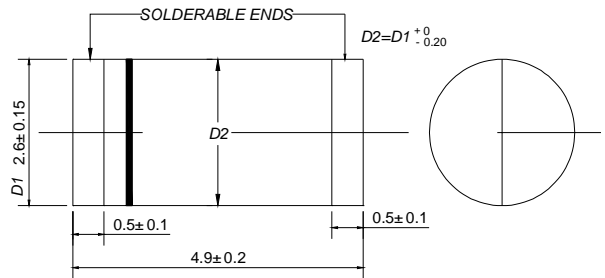

Mechanical Data

- Case: JEDEC DO-213AB,molded plastic
- Polarity: Color band denotes cathode
- Weight: 0.0046 ounces, 0.116 grams
- Mounting position: Any

Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbol	RGL 41A	RGL 41B	RGL 41D	RGL 41G	RGL 41J	RGL 41K	RGL 41M	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward rectified current $T_T=55$	$I_{(AV)}$	1.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	30							A
Maximum instantaneous forward voltage @1.0A	V_F	1.3							V
Maximum reverse current @ $T_A=25$ at rated DC blocking voltage @ $T_A=125$	I_R	5.0 50							μA
Maximum reverse recovery time (Note 1)	t_{rr}	150			250	500		ns	
Typical junction capacitance (Note 2)	C_j	15							pF
Typical thermal resistance (Note 3)	$R_{\theta JA}$	75							/W
Operating junction temperature range	T_j	- 55 ---- +150							
Storage temperature range	T_{STG}	- 55 ---- +150							

NOTE: 1. Measured with $I_F=0.5A, I_R=1.0A, I_{rr}=0.25A$

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.


3. Thermal resistance from junction to ambient, 0.24x0.24"(6.0x6.0mm) copper pads to each terminal.



Ratings AND Characteristic Curves

FIG.1 – FORWARD CURRENT DERATING CURVE


AVERAGE FORWARD RECTIFIED CURRENT, AMPERES

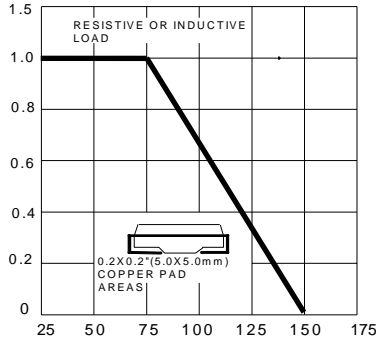

TERMINAL TEMPERATURE

FIG.2 – MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT


PEAK FORWARD SURGE CURRENT, AMPERES

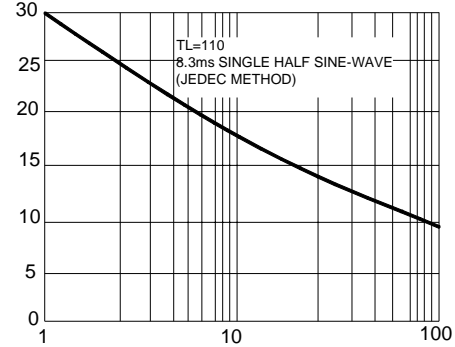

NUMBER OF CYCLES AT 60HZ

FIG.3 – TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS


INSTANTANEOUS FORWARD CURRENT, AMPERES

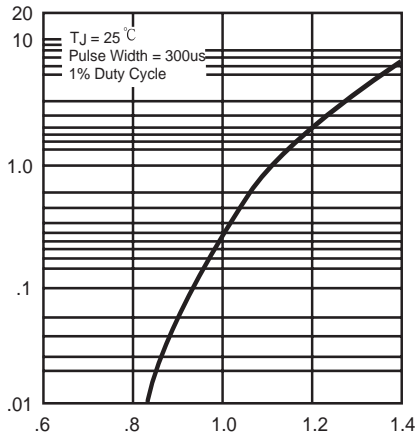

INSTANTANEOUS FORWARD VOLTAGE(V)

FIG.4 – TYPICAL REVERSE CHARACTERISTICS


INSTANTANEOUS REVERSE LEAKAGE CURRENT (mA)

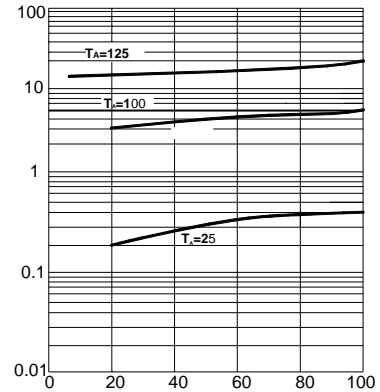

PERCENT OF RATED PEAK REVERSE VOLTAGE. (%)

FIG.5 – TYPICAL JUNCTION CAPACITANCE


JUNCTION CAPACITANCE(pF)

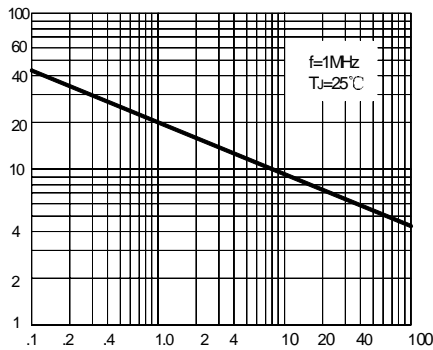

REVERSE VOLTAGE(V)

FIG.6 – TYPICAL TRANSIENT THERMAL IMPEDANCE

TRANSIENT THERMAL IMPEDANCE (°C/W)

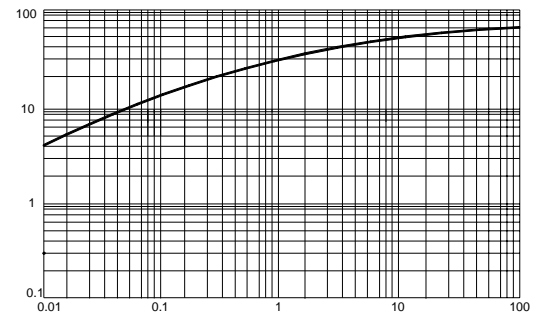

T,PULSE DURATION,

PACKAGE	SPQ/PCS	CARTON SPQ/PCS	CARTON SIZE/CM	CARTON GW/KG	CARTON NW/KG
DO-213AB	5000/REEL	80000	36.0X35.8X36	18.00	16.00