



VOLTAGE RANGE: 100 --- 600 V
CURRENT: 20 A




TO-220AB

Features

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

Mechanical Data

- ◇ Case: JEDEC TO-220AB, molded plastic
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.08 ounces, 2.24 grams
- ◇ Mounting position: Any

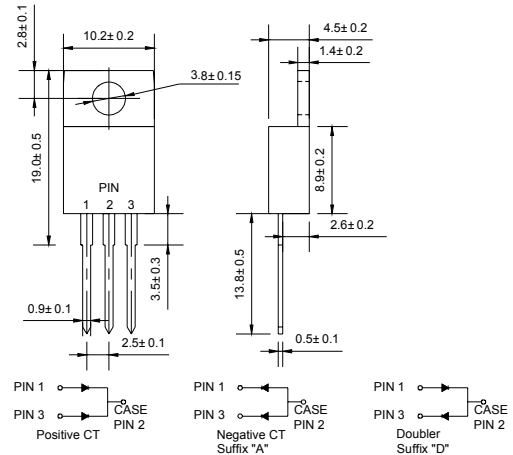

Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		FR 2010C	FR 2020C	FR 2040C	FR 2060C	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	100	200	400	600	V
Maximum RMS voltage	V_{RMS}	70	140	280	420	V
Maximum DC blocking voltage	V_{DC}	100	200	400	600	V
Maximum average forward rectified current @ $T_A=75^\circ\text{C}$	$I_{F(AV)}$	20				A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J=125^\circ\text{C}$	I_{FSM}	200				A
Maximum instantaneous forward voltage @ 10 A	V_F	1.3				V
Maximum reverse current @ $T_A=25^\circ\text{C}$ at rated DC blocking voltage @ $T_A=100^\circ\text{C}$	I_R	10 150				μA
Maximum reverse recovery time (Note1)	t_{rr}	150			250	ns
Typical junction capacitance (Note2)	C_J	35				pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	3.0				$^\circ\text{C/W}$
Operating junction temperature range	T_J	- 55 --- + 150				$^\circ\text{C}$
Storage temperature range	T_{STG}	- 55 --- + 150				$^\circ\text{C}$

NOTE: 1. Measured with $I_F=0.5\text{A}$, $I_R=1\text{A}$, $I_{rr}=0.25\text{A}$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.



Ratings AND Characteristic Curves

FIG.1 – FORWARD DERATING CURVE

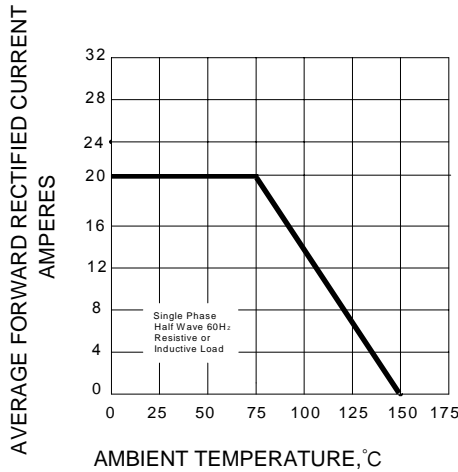


FIG.2-PEAK FORWARD SURGE CURRENT

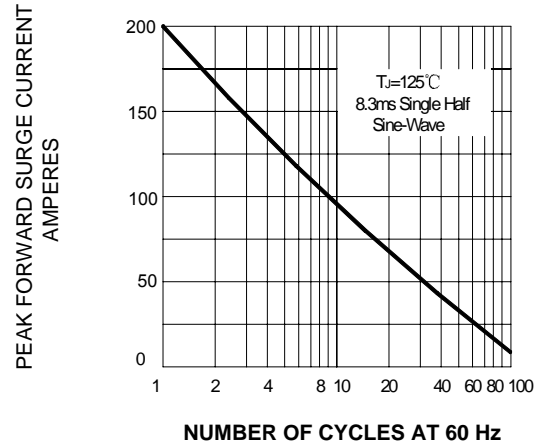


FIG.3--TYPICAL JUNCTION CAPACITANCE

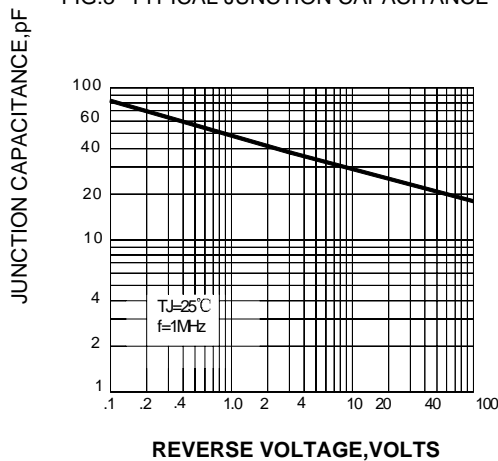


FIG.4 --TYPICAL FORWARD CHARACTERISTIC



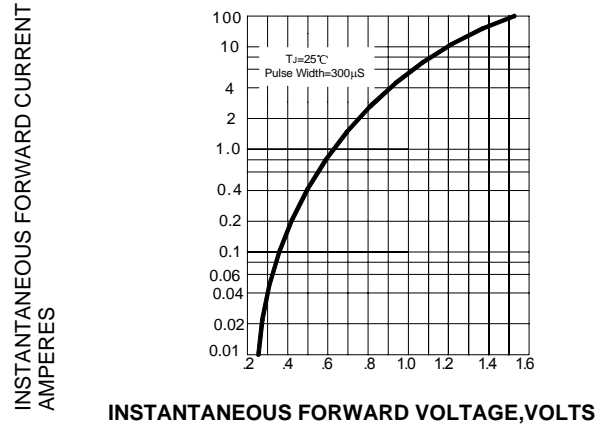


FIG5 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

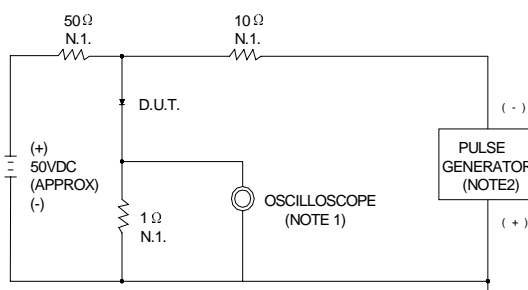

NOTES:1.RISE TIME =7ns MAX. INPUT IMPEDANCE=1MΩ .22pF
2.RISE TIME=10ns MAX. SOURCE IMPEDANCE=50Ω

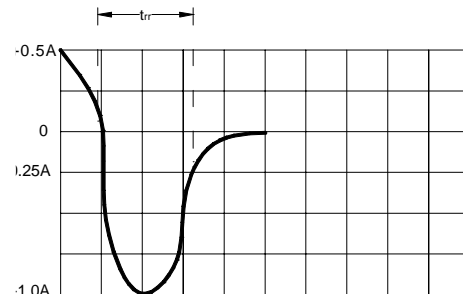

SET TIME BASE FOR 50/100 ns /cm

Package	Packing	Box Size LxWxH(mm)	Quantity(pcs/box)	Carton Size LxWxH(mm)	Quantity(pcs/carton)
TO-220	50pcs/Tube	558x148x38	1000	565x225x175	5000



FR2010C-FR2060C

Fast Recovery Rectifiers



PACKAGE	PCS/TUBE	CARTON	CARTON	CARTON	CARTON NW/KG
TO-220	50	5000	57*22*18	13	9