





### Features

- Small surface mounting type
- High speed switching
- High reliability



### Mechanical Data

- Case: SOD-323
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208



SOD-323

### Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
1SS355	SOD-323	3000 pcs / Tape & Reel	A

### Maximum Ratings (@ T<sub>A</sub> = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Non-Repetitive Peak Reverse Voltage	V <sub>RM</sub>	90	V
DC Blocking Voltage	V <sub>R</sub>	80	V
Average Rectified Output Current	I <sub>o</sub>	100	mA
Non-repetitive Peak Forward Surge Current, t = 1s	I <sub>FSM</sub>	0.5	A

### Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P <sub>D</sub>	200	mW
Thermal Resistance Junction-to-Air <sup>*1</sup>	R <sub>θJA</sub>	315	°C/W
Thermal Resistance Junction-to-Lead <sup>*1</sup>	R <sub>θJL</sub>	260	°C/W
Thermal Resistance Junction-to-Case <sup>*1</sup>	R <sub>θJC</sub>	230	°C/W
Operating Junction Temperature Range	T <sub>J</sub>	-55 ~ +150	°C
Storage Temperature Range	T <sub>STG</sub>	-55 ~ +150	°C

Note 1: The data tested by surface mounted on a 1 inch<sup>2</sup> FR-4 board with 2OZ copper

### Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Typ.	Max.	Unit
Reverse Breakdown Voltage	$V_{(BR)R}$	$I_R = 100\mu\text{A}$	80	-	V
Forward Voltage	$V_F$	$I_F = 100\text{mA}$	-	1.2	V
Maximum Peak Reverse Current	$I_R$	$V_R = 80\text{V}$	-	0.1	$\mu\text{A}$
Total Capacitance	$C_J$	$V_R = 0.5\text{V}, f = 1.0\text{MHz}$	-	3	pF
Reverse Recovery Time	$t_{rr}$	$I_F = I_R = 10\text{mA}$ $I_{rr} = 0.1 \times I_R, R_L = 100\Omega$	-	4	ns

### Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

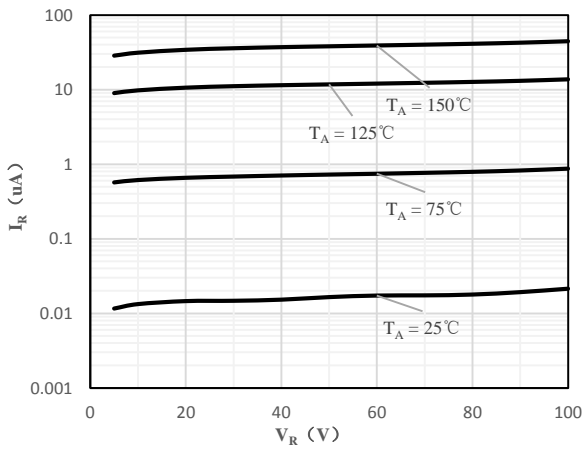


Fig 1 Typical Reverse Characteristic

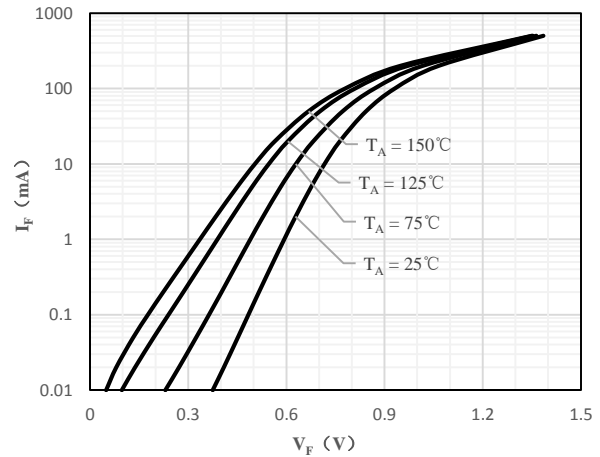


Fig 2 Typical Forward Characteristics


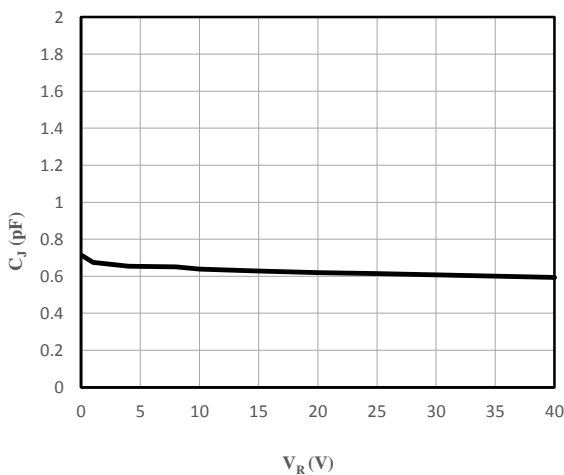


Fig 3 Capacitance vs. Reverse Voltage



## Package Outline Dimensions (Unit: mm)

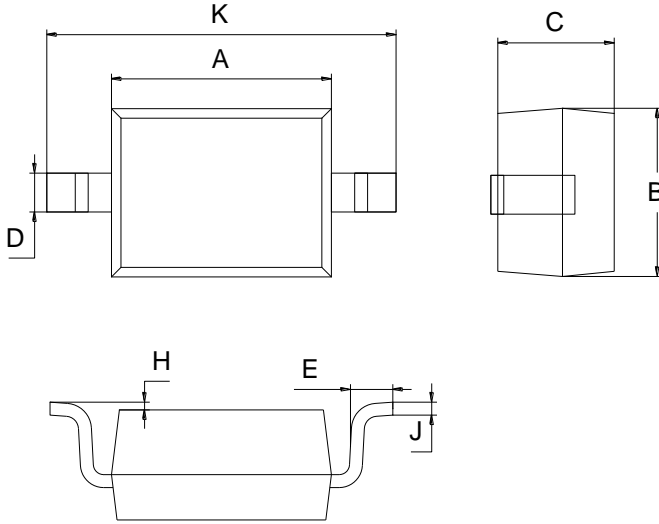

SOD-323		
Dimension	Min.	Max.
A	1.60	1.80
B	1.20	1.40
C	0.80	0.90
D	0.25	0.35
E	0.22	0.42
H	0.02	0.10
J	0.05	0.15
K	2.55	2.75

## Mounting Pad Layout (Unit: mm)

### SOD-323

