





Features

- Fast switching
- Low forward voltage
- RoHS compliant with Halogen-free



Mechanical Data

- Case: DFN1006-2
- Molding compound: UL flammability classification rating 94-0
- Terminals: Tin-plated; solderability per MIL-STD-202, Method 208



DFN1006-2

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
BAT54L	DFN1006-2	10000 pcs / Tape & Reel	L9

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	V _{RRM}	30	V
Working Peak Reverse Voltage	V _{RWM}	30	V
DC Reverse Voltage	V _R	30	V
Continuous Forward Current	I _F	200	mA
Peak Forward Surge Current (t _p = 1s)	I _{FSM}	600	mA

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P _D	100	mW
Thermal Resistance (Junction-to-Ambient)	R _{ΘJA}	1000	°C/W
Operating junction Temperature	T _J	-55 ~ +125	°C
Storage Temperature Range	T _{STG}	-55 ~ +150	°C



Electrical Characteristics (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage	V _(BR)	I _R = 100μA	30	-	-	V
Forward Voltage *1	V _F	I _F = 0.1mA	-	-	0.24	V
		I _F = 1mA	-	-	0.32	V
		I _F = 10mA	-	-	0.40	V
		I _F = 30mA	-	-	0.50	V
		I _F = 100mA	-	-	0.80	V
Maximum Peak Reverse Current *2	I _R	V _R = 25V	-	-	2	μA
Capacitance Between Terminals	C _T	V _R = 1V, f = 1MHz	-	-	10	pF
Reverse Recovery Time	t _{rr}	I _F = I _R = 10mA I _{rr} = 0.1*I _R , R _L = 100Ω	-	-	5	ns

Notes:

1. Pulse test, t_p ≤ 300μs
2. Pulse test, t_p ≤ 5ms



Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

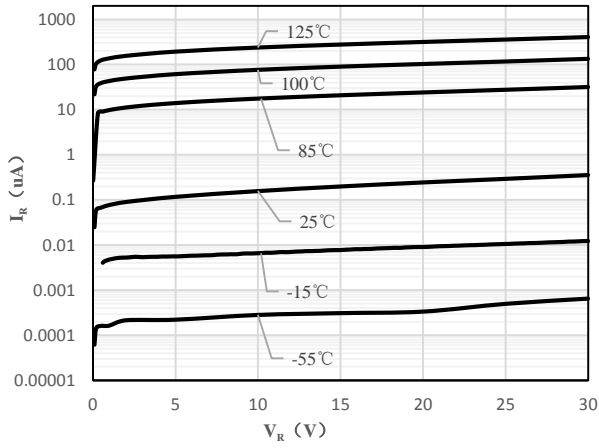


Fig 1 Typical Reverse Characteristic

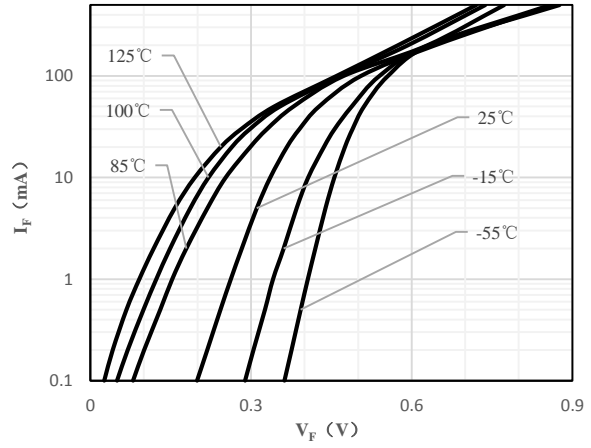


Fig 2 Typical Forward Characteristics

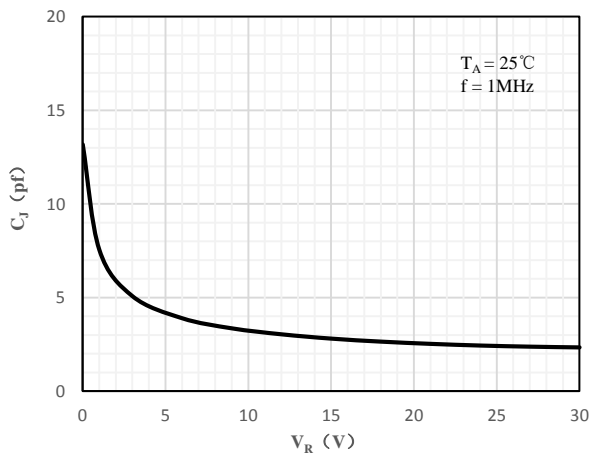


Fig 3 Capacitance Characteristics


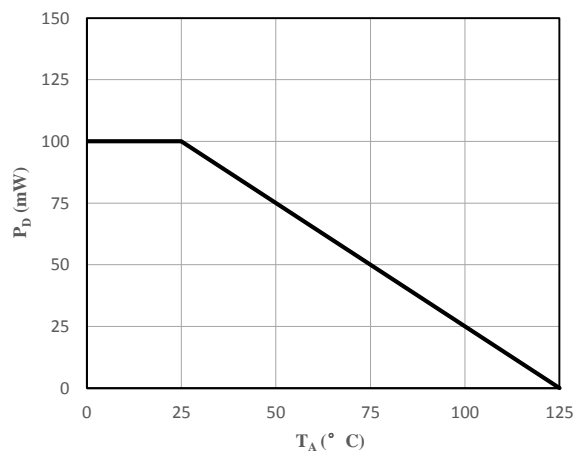


Fig 4 Power Derating Curve



Package Outline Dimensions (Unit: mm)

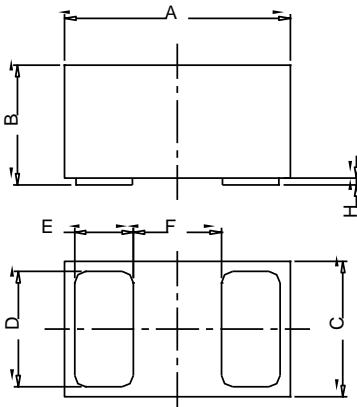

DFN1006-2			
Dimension	Min.	Typ.	Max.
A	0.95	1.00	1.075
B	0.47	0.50	0.53
C	0.55	0.60	0.675
D	0.45	0.50	0.55
E	0.20	0.25	0.30
F	-	0.40	-
H	0	0.03	0.05

Package Outline Dimensions (Unit: mm)

DFN1006-2

