




## FEATURES

- Output current in excess of 0.5A
- No external components
- Internal thermal overload protection
- Internal short circuit current-limiting
- Output transistor safe-area compensation

## APPLICATIONS

- Three-terminal positive voltage regulator

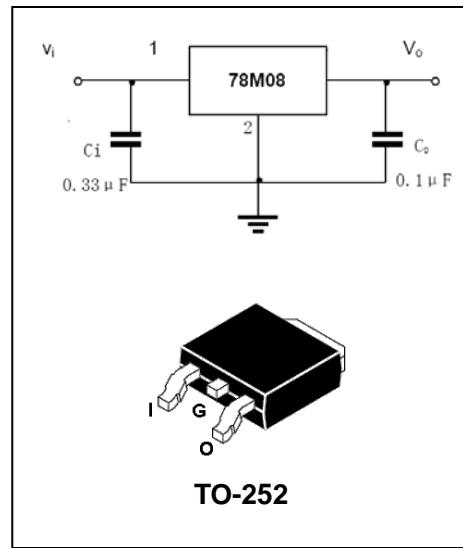

## Ordering Information

Part Number	Package	Shipping	Marking Code
78M08	TO-252	80pcs / Tube or 2500pcs / Tape & Reel	78M08

**MAXIMUM RATING** operating temperature range applies unless otherwise specified

Symbol	Parameter	Value	Units
V <sub>I</sub>	Input voltage	35	V
P <sub>D</sub>	Power Dissipation	1.25	W
R <sub>θJA</sub>	Thermal Resistance Junction-Air	92	°C/W
T <sub>OPR</sub>	Operating junction temperature	0 to 125	°C
T <sub>stg</sub>	Storage temperature range	-65 to +150	°C



## ELECTRICAL CHARACTERISTICS


( $V_{IN}=14V, I_O=350mA, C_{IN}=0.33\mu F, C_O=0.1\mu F$ , unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	$V_O$	$I_O=350mA, V_{IN}=14V$ $5mA \leq I_O \leq 350mA$ $10.5V \leq V_{IN} \leq 23V$	7.7 7.6 7.6	8.0 8.0 8.0	8.3 8.4 8.4	V
Load regulation(Note1)	$\Delta R_{Reg,load}$	$5mA \leq I_O \leq 500mA$ $5mA \leq I_O \leq 200mA$			160 80	mV
Line regulation(Note1)	$\Delta R_{Reg,line}$	$10.5V \leq V_{IN} \leq 25V, I_O=200mA$ $11V \leq V_{IN} \leq 25V, I_O=200mA$			100 50	mV
Quiescent Current	$I_Q$	$V_{IN}=14V, I_O=350mA$		4.0	6.0	mA
Quiescent Current Change	$\Delta I_Q$	$5mA \leq I_O \leq 350mA$ $10.5V \leq V_{IN} \leq 25V, I_O=200mA$			0.5 0.8	mA
Output Voltage Drift	$\Delta V / \Delta T$	$I_O=5mA, T_J=0 \text{ to } +125^\circ C$		-0.5		mV/°C
Output Noise Voltage	$V_N$	$10Hz \leq f \leq 100KHz$		52		µV/V <sub>O</sub>
Ripple Rejection	$RR$	$f=120Hz, I_O=300mA,$ $V_I=9V \text{ to } 19V$	56			dB
Dropout Voltage	$V_D$	$T_A=+25^\circ C, I_O=500mA$		2.0		V
Short Circuit Current	$I_{SC}$	$V_I=35V, T_J=25^\circ C$		300		mA
Peak Current	$I_{PK}$	$T_J=25^\circ C$		700		mA

Note:1.Load and line regulation are specified at constant junction temperature. Change in  $V_O$  due to Heating effects must be taken into account separately. Pulse testing with low duty is used.



## PACKAGE OUTLINE

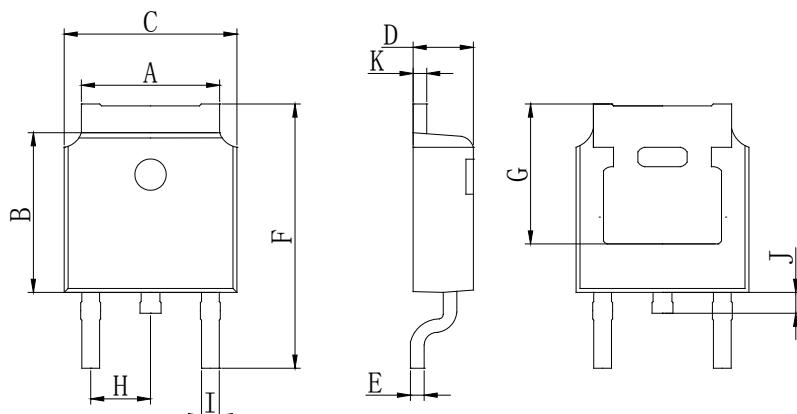

TO-252		
A	5.05	5.65
B	5.80	6.40
C	6.25	6.85
D	2.20	2.40
E	0.40	0.60
F	9.71	10.31
G	5.05	5.65
H	2.10	2.50
I	0.70	0.90
J	0.50	0.7
K	0.40	0.60

All Dimensions in mm

## SOLDERING FOOTPRINT

