



1. EMITTER
2. COLLECTOR
3. BASE


Features

- ✧ Driver stage amplifier
- ✧ Complement to KSA916

MAXIMUM RATINGS (T_A=25°C unless otherwise noted)

Symbol	Parameter	Value	Units
V _{CBO}	Collector-Base Voltage	120	V
V _{CEO}	Collector-Emitter Voltage	120	V
V _{EBO}	Emitter-Base Voltage	5	V
I _C	Collector Current -Continuous	800	mA
P _C	Collector Power Dissipation	900	mW
T _J	Junction Temperature	150	°C
T _{stg}	Storage Temperature	-55-150	°C

TO-92MOD

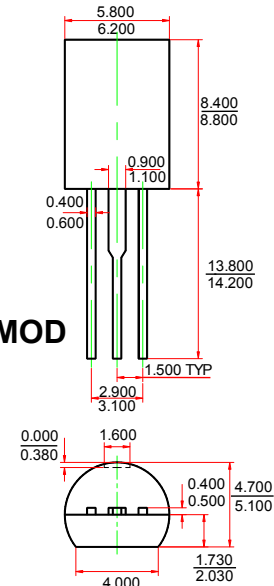

Dimensions in inches and (millimeters)

ELECTRICAL CHARACTERISTICS (T_{amb}=25°C unless otherwise specified)


Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	V _{(BR)CBO}	I _C =1mA, I _E =0	120			V
Collector-emitter breakdown voltage	V _{(BR)CEO}	I _C =10mA, I _B =0	120			V
Emitter-base breakdown voltage	V _{(BR)EBO}	I _E =1mA, I _C =0	5			V
Collector cut-off current	I _{CBO}	V _{CB} =120V, I _E =0			0.1	μA
DC current gain	h _{FE(1)}	V _{CE} =5V, I _C =10mA	60			
	h _{FE(2)}	V _{CE} =5V, I _C =100mA	80		240	
Collector-emitter saturation voltage	V _{CE(sat)}	I _C =500mA, I _B =50mA			1	V
Transition frequency	f _T	V _{CE} =5V, I _C =100mA		120		MHz
Collector output capacitance	C _{ob}	V _{CB} =10V, I _E =0, f=1MHz			30	pF

CLASSIFICATION OF h_{FE(2)}

Rank	O	Y
Range	80-160	120-240



Typical Characteristics

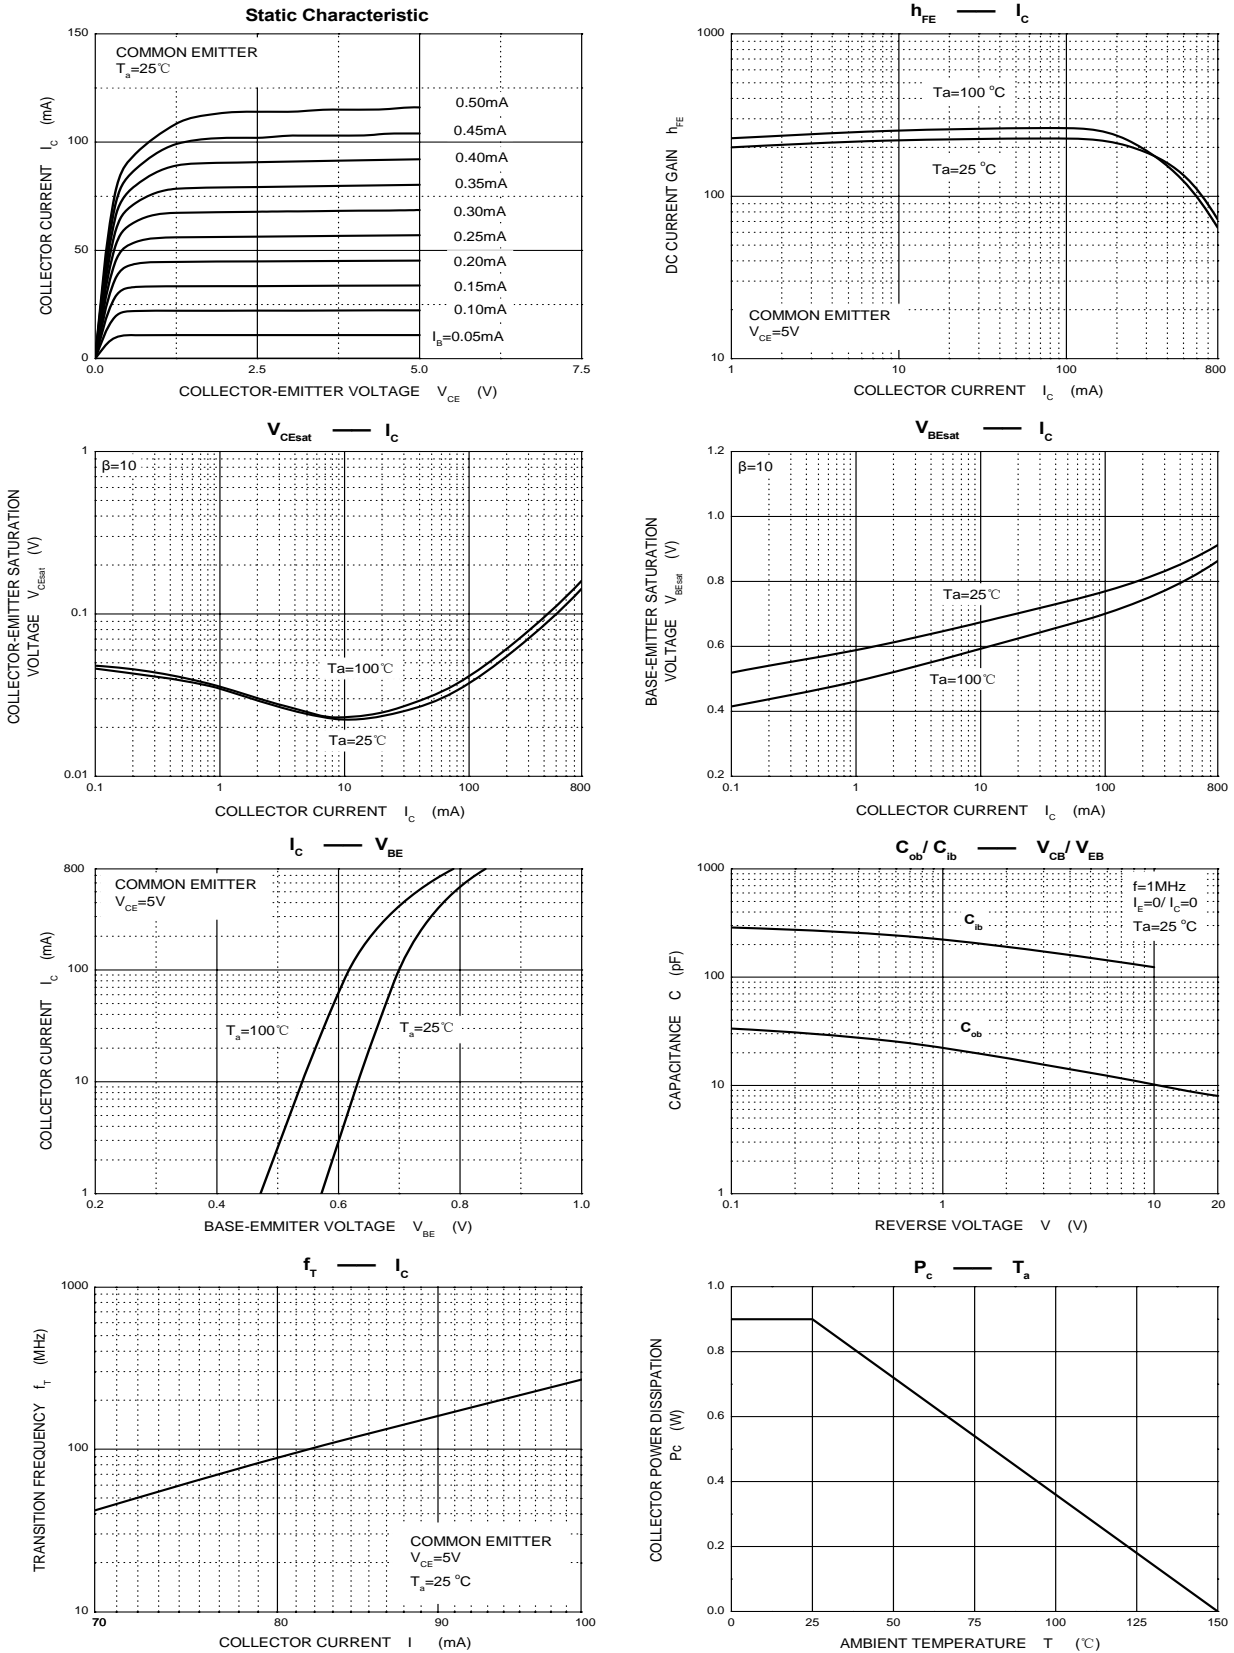

Package	Packing	Quantity	Box	Box Size(mm)	Carton	Carton Size(mm)
TO-92MOD	Bulk	500pcs/BP	5000pcs	245×170×100	50,000pcs	525×375×270
TO-92MOD	Tape	2000pcs/TP	2000pcs	333×245×43	20,000pcs	502×403×300