


FEATURES

- Rating to 1000V PRVP
- Surge overload rating to 60 Amperes peak
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- Lead solderable per MIL-STD-202 method 208
- Glass passivated chip junctions
- Plastic material has UL flammability classification 94V-0



Dim	DB-1	
	Min	Max
A	7.80	8.50
B	6.10	6.50
C	2.35	2.65
E	0.15	0.35
F	5.40	6.00
I	0.35	0.65
J	8.40	9.00
K	4.80	5.20
L	7.65	8.15

All Dimensions in mm

Maximum Ratings (@TA = 25°C unless otherwise specified)

Characteristic	Symbol	DB201	DB202	DB203	DB204	DB205	DB206	DB207	UNITS
Peak Repetitive Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
RMS Reverse Voltage	V_{RMS}	35	75	140	280	420	560	700	V
DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward Output current @TA=25°C	$I_{F(AV)}$	2.0							A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I_{FSM}	60							A
I ² t Rating for fusing @Tj=25°C	I ² t	14.9							A ² S

Thermal Characteristics

Characteristic	Symbol	DB201	DB202	DB203	DB204	DB205	DB206	DB207	UNITS
Typical thermal resistance per leg (Note 1)	$R_{\theta JA}$	70							°C/W
	$R_{\theta JC}$	31							
	$R_{\theta JL}$	29							
Operating junction temperature range	T_J	- 55 ---- + 150							°C
Storage temperature range	T_{STG}	- 55 ---- + 150							°C

Note: 1. Device mounted on PCB with 10 mm x 20 mm x 0.1mm copper pad areas

Electrical Characteristics (@TA = 25°C unless otherwise specified)

Characteristic	Symbol	DB201	DB202	DB203	DB204	DB205	DB206	DB207	UNITS
Maximum instantaneous forward voltage at 2.0 A	V_F	1.1							V
Maximum reverse current @TA=25°C at rated DC blocking voltage @TA=100°C	I_R	5.0							μ A
		0.5							mA



FIG.1 -- PEAK FORWARD SURGE CURRENT

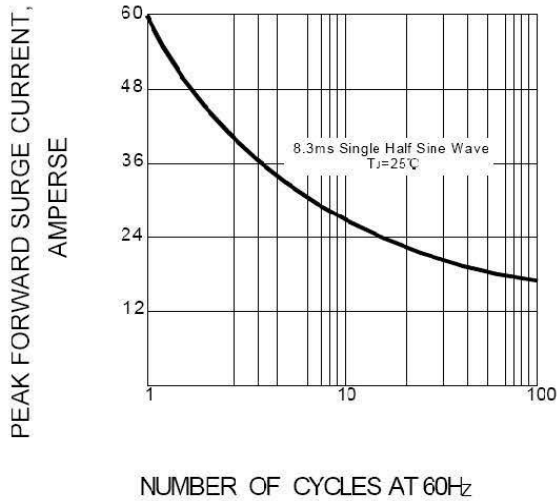


FIG.2 -- FORWARD DERATING CURVE

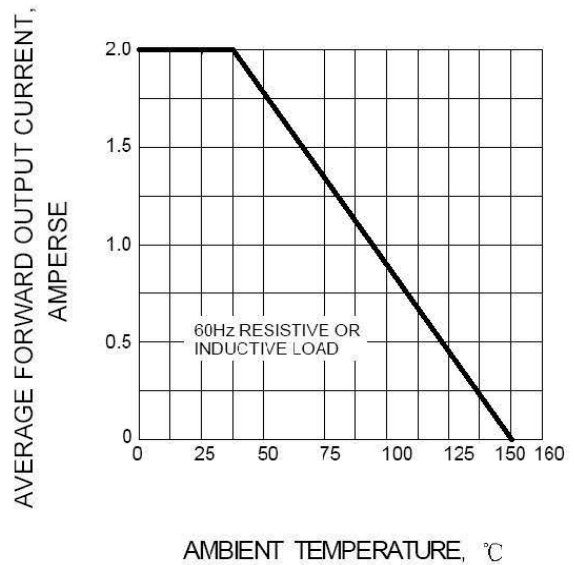


FIG.3 -- TYPICAL FORWARD CHARACTERISTIC


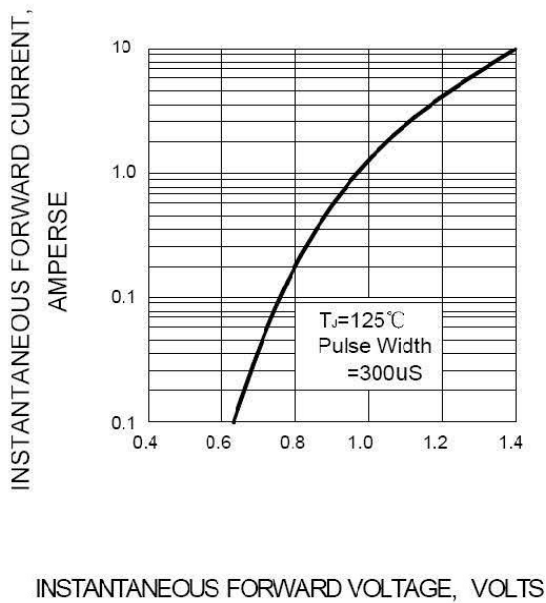


FIG.4 -- TYPICAL REVERSE CHARACTERISTIC

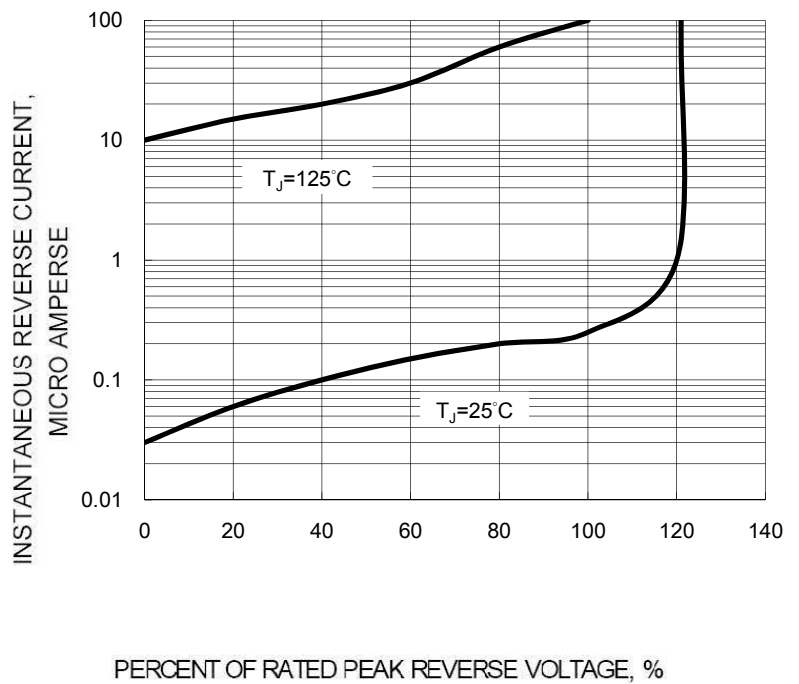

Device	Package	Shipping
DB201-DB207	DB-1	50unit/pipe