


FEATURES

- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- Plastic material has U/L flammability classification 94V-0
- Mounting position: Any
- Glass passivated chip junctions

Maximum Ratings (@TA = 25°C unless otherwise specified)

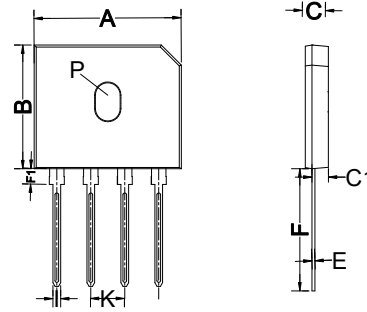

| GBU | | |
|-----|-------------|-------|
| Dim | Min | Max |
| A | 21.60 | 22.40 |
| B | 18.20 | 19.80 |
| C | 3.20 | 3.80 |
| C1 | 1.80 | 2.80 |
| E | 0.40 | 0.60 |
| F | 17.00min | |
| F1 | 1.70 | 2.40 |
| I | 0.95 | 1.25 |
| K | 4.70 | 5.30 |
| P | R1.9typical | |

All Dimensions in mm.

| Characteristic | Symbol | GBU6A | GBU6B | GBU6D | GBU6G | GBU6J | GBU6K | GBU6M | UNITS |
|---|------------------|-------|-------|-------|-------|-------|-------|-------|------------------|
| Maximum recurrent peak reverse voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC blocking voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum average forward Tc=100°C Output current | $I_{F(AV)}$ | 6.0 | | | | | | | A |
| Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load | I_{FSM} | 175.0 | | | | | | | A |
| I ² t Rating for fusing @Tj=25°C | I ² t | 127 | | | | | | | A ² S |

Thermal Characteristics

| Characteristic | Symbol | GBU6A | GBU6B | GBU6D | GBU6G | GBU6J | GBU6K | GBU6M | UNITS |
|--|------------------------------------|-----------------|-------|-------|-------|-------|-------|-------|-------|
| Typical junction capacitance per element(note 3) | C_J | 211 | | | | 94 | | | p F |
| Typical thermal resistance (note2) (note21) | $R_{\theta JA}$ $R_{\theta JC}$ | 2.2 | | | | 2.5 | | | °C/W |
| Operating junction temperature range | T_J | - 55 ---- + 150 | | | | | | | °C |
| Storage temperature range | T_{STG} | - 55 ---- + 150 | | | | | | | °C |

Electrical Characteristics (@TA = 25°C unless otherwise specified)

| Characteristic | Symbol | GBU6A | GBU6B | GBU6D | GBU6G | GBU6J | GBU6K | GBU6M | UNITS |
|---|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| Maximum instantaneous forward voltage @3.0A @6.0A | V_F | 1.0 | | | | 1.1 | | | V |
| Maximum reverse current @TA=25 °C at rated DC blocking voltage @TA=125 °C | I_R | 5.0 | | | | 500 | | | μ A |

NOTE: 1. Unit case mounted on 2.6x1.4x0.06" thick (6.5x3.5x0.15cm) Al. Plate.

2. Recommended mounting position is to bolt down on heatsink with silicone thermal compound f or maximum heat transfer with #6 screws

3. Measured at 1.0 MHz and applied reverse voltage of 4.0 volts.

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

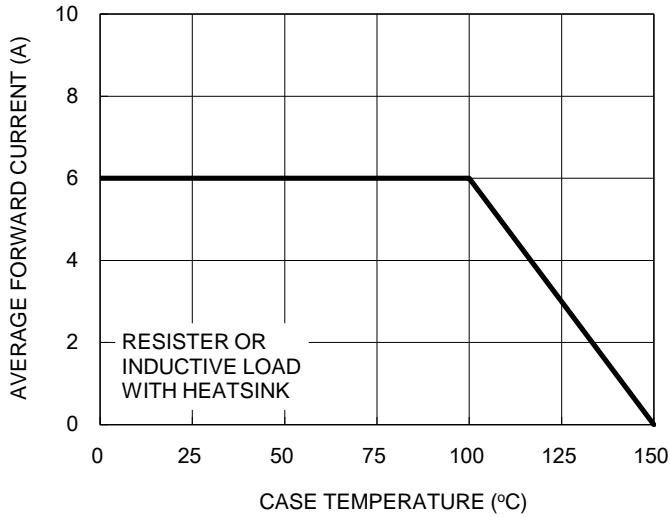


Fig.2 Typical Junction Capacitance

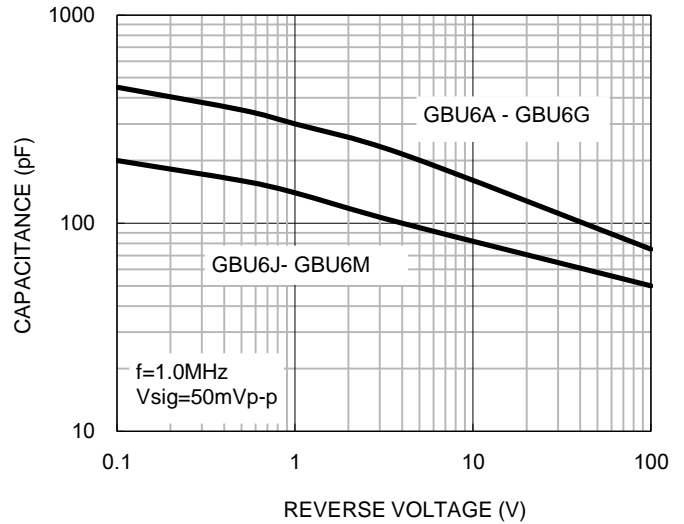


Fig.3 Typical Reverse Characteristics


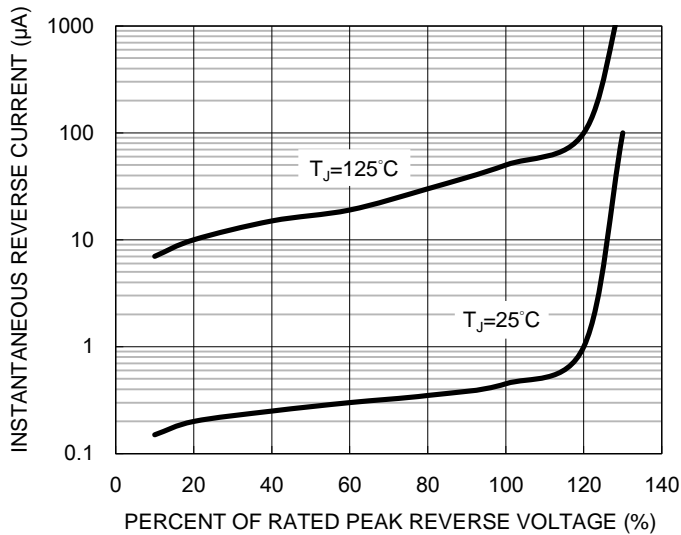



Fig.4 Typical Forward Characteristics

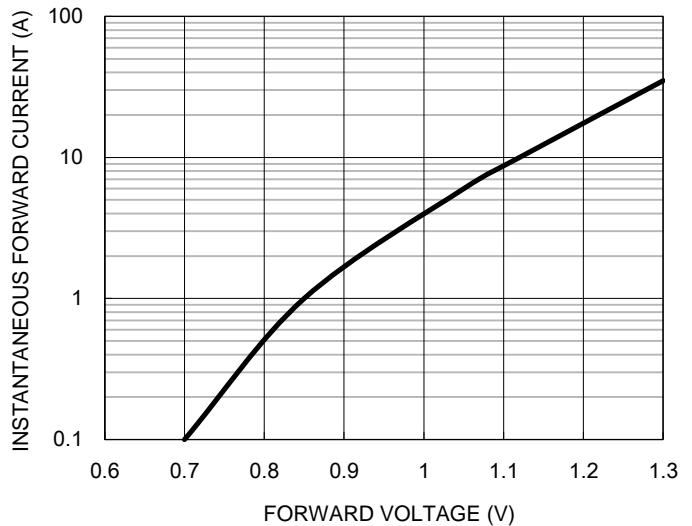

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.5 Maximum Non-repetitive Forward Surge Current

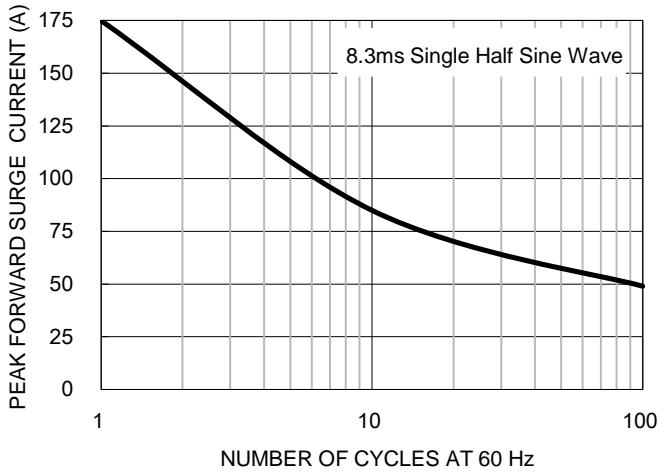

| Device | Package | Shipping |
|--------------|---------|---------------|
| GBU6A--GBU6M | GBU | 500 Units/Box |