



Features

- Glass passivated junction
- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- Surge overload ratings to 85 amperes peak
- Ideal for printed circuit board application
- High temperature soldering guaranteed 265°C/10 seconds at 5 lbs(2.3kg)tension

Mechanical Data


Case:Molded plastic

Terminals:Platde leads solderable per MIL-STD-750, Method 2026

Polarity:Polarity symbols molded or Marked on body

Mounting Position:Any

Weight:0.011 ounce,0.32 grams(approx)

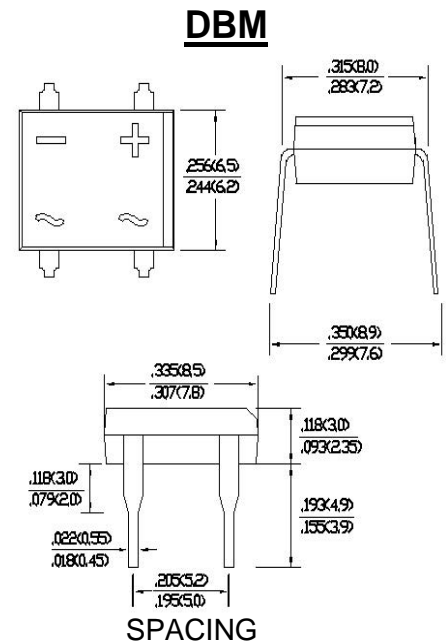

Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified,Resistive or inductive load,60HZ.

For Capacitive load derate current by 20%

Parameter	Symbol	DB301	DB302	DB303	DB304	DB305	DB306	DB307	unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at TA=40°C	IF(AV)	3.0							A
Peak forward surge current 8.3ms single sine-wave super imposed on rated load (JEDEC Method)	IFSM	85							A
Rating for fusing(t<8.3ms)	I ² t	30							A ² sec
Typical Junction capacitance Per Element(Note 1)	C _j	35							p F
Typical thermal resistance (Note 2)	R _{θJA}	68							°C/w
Operating j temperature range	T _J	-55to+150							°C
Storage temperature range	T _{STG}	-55to+150							°C

Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified,Resistive or inductive load,60HZ.

For Capacitive load derate current by 20%

Parameter	Symbol	DB301	DB302	DB303	DB304	DB305	DB306	DB307	unit
Maximum instantaneous forward voltage drop per leg at 3.0A	V _F	1.1							V
Maximum DC reverse current at ratde TA=25°C	I _R	5							μ A
DC blocking voltage per element TA=125°C		100							

Notes: (1)Measured at 1.0MHz and applied reverse voltage of 4.0 V DC.

(2)Thermal resistance from junction to ambient mounted on P.C.B with 0.5*0.5(13*13mm)copper pads



DB301-DB307

3.0A Single-Phase GLass Passivated Bridge Rectifiers



Rating and Characteristic Curves (TA=25°C Unless otherwise noted)

FIG.1-DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

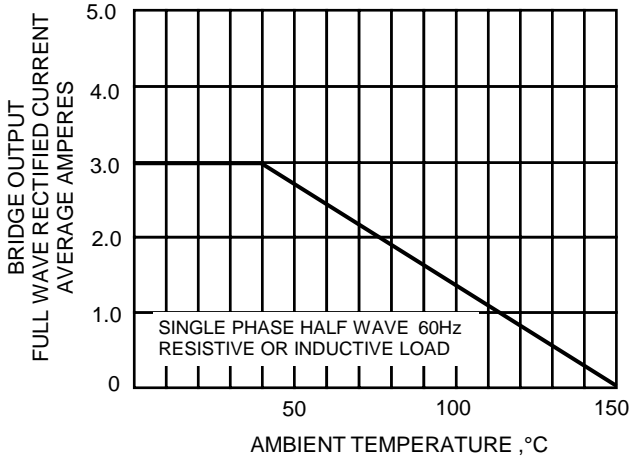


FIG.2-MAXIMUM NON-REPETITIVE SURGE CURRENT

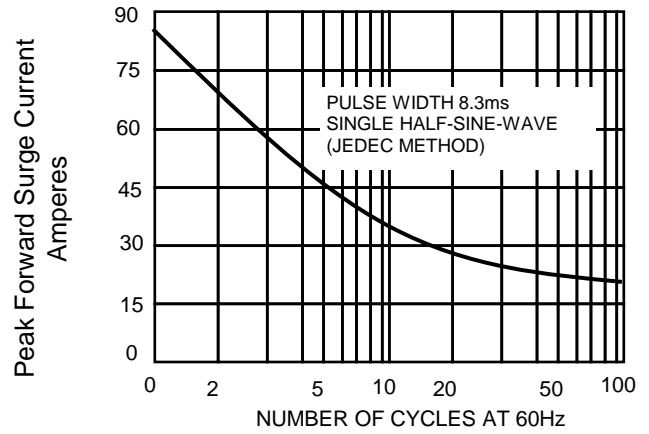


FIG.3-TYPICAL JUNCTION CAPACITANCE

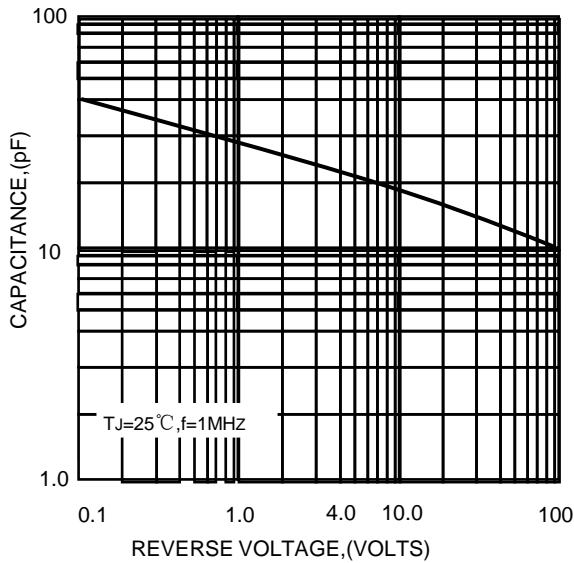


FIG.4-TYPICAL FORWARD CHARACTERISTICS


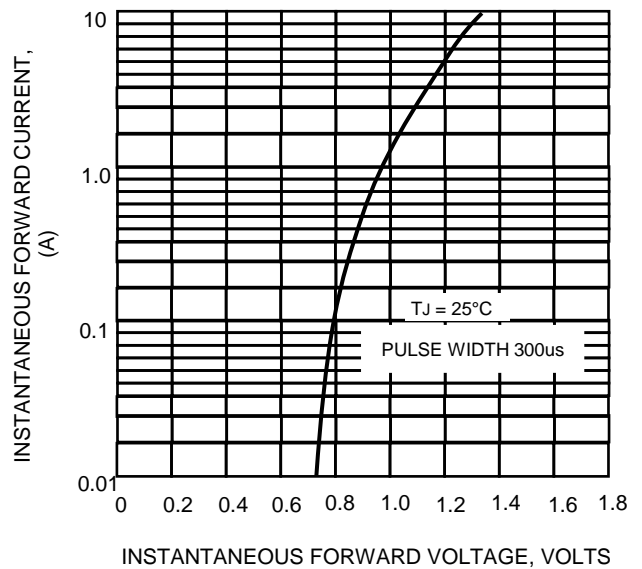


FIG.5-TYPICAL REVERSE CHARACTERISTICS



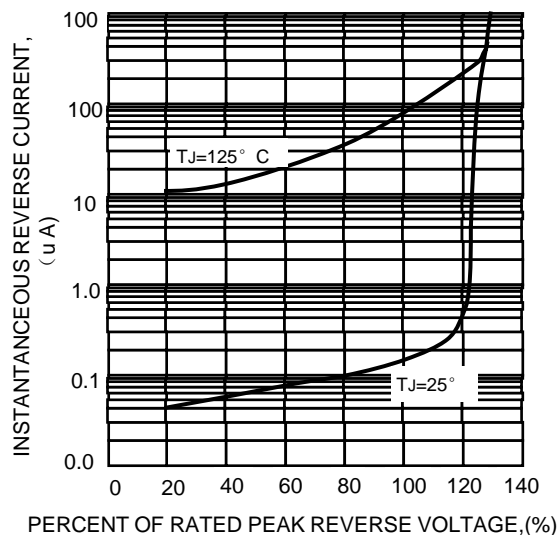

DB301-DB307

3.0A Single-Phase GLass Passivated Bridge Rectifiers



Ordering Information(Example)

PREFFREN P/N	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
DB301~DB307	Approximate 0.32	50	2500	10000	TUBE